



W-W line of products include:

- Squeeze Chutes
- Hydraulic Chutes
- Corral Systems
- Horse Stalls
- Roping Arenas
- Rodeo Arenas
- Panels and Gates
- Round Pens
- Maternity Pens
- Crowd Alleys
- Portable Scales
- And many more!




AT&T Center, San Antonio, Texas.



Show ring, San Antonio, Texas.



Custom plans for future additions are available—similar to the stage (30' x 70') over the holding pens as shown.

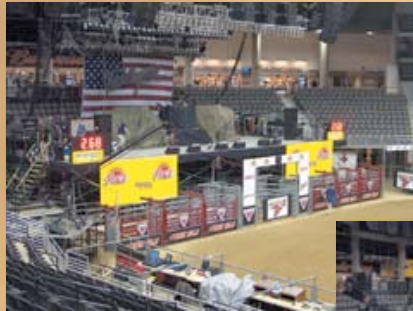

River City Roundup, Omaha, Nebraska.



Rio Grande Valley Livestock Show, Mercedes, Texas.



Hog and sheep barn for fair grounds, San Angelo, Texas.

All W-W hog and sheep components are constructed from A-513 High Tensile steel tubing with 50,000-PSI yield strength. All joints are saddle cut for extra strength. Framework is built from 1.5" x 14 gauge round steel tubing. Interior rails are fabricated from 1.5" x 16-gauge tubing. Gate frame is 72" tall and panels are available in either 41" or 48" height. All units interlock with self-contained permanently attached drop pins. Gate latch also consists of self-contained drop pin. All units feature an attractive gray powder coat finish.




San Angelo, Texas show ring with holding pens.

Your contracted engineers will supply W-W with architectural drawings that we import into our CAD system for accurate layouts. Shown is the Nueces County Fairgrounds near Robstown, Texas.



Quest Center, Omaha, Nebraska.

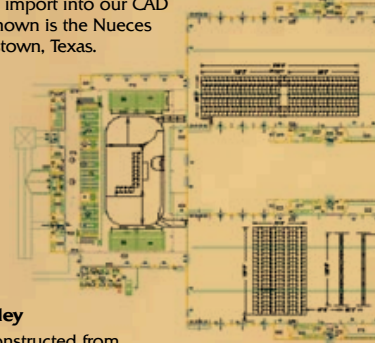

Cattle tie stalls with tack alley

All tie stall components are constructed from 1.5" x 14 gauge high tensile steel tubing with 50,000-PSI yield strength. All joints are saddle cut for extra strength. Tie stall frame and Alley Control frame height is 84". Top interior rail of panel is 48" high with 40" tie positions. Units interlock with self-contained permanently attached drop pins. All units painted with attractive long lasting gray powder coat.



Quest Center, Omaha, Nebraska.



Nueces County Fairgrounds, Robstown, Texas.


Champion Horse Stalls at Georgia International Horse Park, Conyers, Georgia.



Houston Livestock Show and Rodeo.



Reliant Stadium, Houston, Texas.

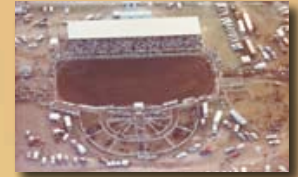

Dodge City Roundup Rodeo Arena, Dodge City, Kansas.



Horse Stalls at Expo Center, Shawnee, Oklahoma.

Standard portable stalls

All portable stall components are constructed from A-513 high tensile steel tubing with 50,000-PSI yield strength. All joints on framework are saddle cut for extra strength. All units interlock with self-contained, permanently attached drop pins. All units are 6' 10 1/2" tall and available in 10' or 12' lengths. 48" doors are secured with spring loaded latches. Lower part of stalls includes 3/4" BB Plyform inserts. All units feature an attractive long lasting, gray powder coat finish.



Mississippi State University.



Star of Texas Fair, Austin, Texas.



Powder coat, pre-galv. or hot-dipped galvanized finishes available.



Larimer County Fair, Fort Collins, Colorado.

Stalls are also available with high-density HDPE plastic inserts.